

Implementation of Novel eCombustible Technology at the Anglo American Barro Alto Smelter

1

INTRODUCTION

As part of Anglo American’s strategic plan to produce carbon-neutral ferronickel, the mining company has partnered with eCombustible Energy LLC to implement their patented technology to generate a customizable hydrogen-based fuel from a novel process which consists primarily of a water electrolyzer followed by a magnetic reactor. The proprietary hydrogen-based fuel has a higher calorific value than conventional molecular hydrogen fuel on a volume basis. This gaseous product is named eCombustible.

Gas Cleaning Technologies LLC and eCombustible Energy LLC are engineering the implementation of an eCombustible fuel generation plant to be installed within Anglo American’s Barro Alto Industrial Complex with the goal of decarbonising some thermal applications which currently consume Liquefied Petroleum Gas (LPG).

2

BARRO ALTO INDUSTRIAL COMPLEX

The Anglo American Barro Alto Industrial Complex is a nickel production facility located in the municipality of Barro Alto, Goiás, in Brazil’s mid-west region. Figure 1 shows location details.

The nickel (contained in ferronickel) production process adopted in the Barro Alto Industrial Complex consists of ore crushing, homogenization, drying, calcining, reduction and refining. The Rotary Kiln – Electric Furnace (RKEF) technology is employed for calcination and reduction of the ore. Figure 2 shows the Barro Alto Industrial Complex general process flowsheet.



Fig. 1. Location of the Barro Alto Industrial Complex within Brazil

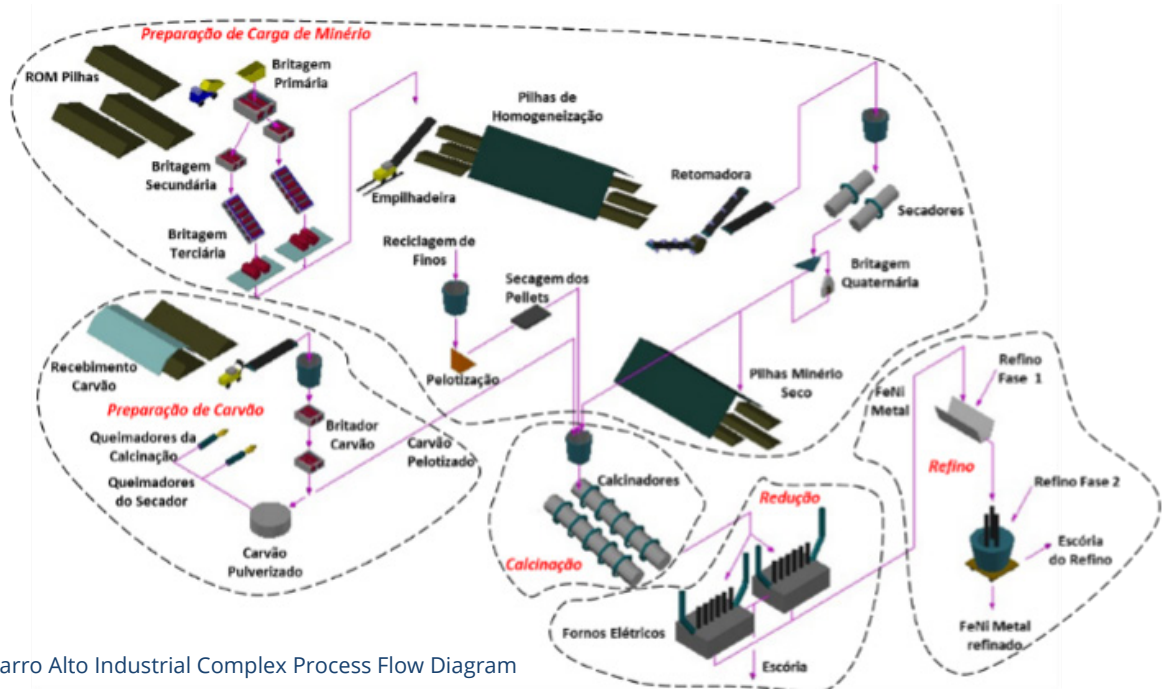


Fig. 2. Barro Alto Industrial Complex Process Flow Diagram

The ore extracted from the Barro Alto mine is initially processed in the ore preparation process where the stages of crushing, homogenization and drying take place. The prepared ore is fed to two rotary kilns (calcination stage), where the load is completely dried and calcined. The energy required for the operation comes from the use of pulverized coal, LPG and heavy fuel oil. With the rotary kiln feed, a charge of reducing carbon is also added which participates in nickel reduction reactions during the reduction stage. In addition, dry pellets are fed into the calciners, which are produced using ore fines that are recovered from the calcination and reduction processes. Out of the rotary kilns, the calcined ore is fed into two rectangular Electric Furnaces, where the charge is smelted to produce the pay metal (ferronickel or FeNi) and slag. The ferronickel is transferred in ladles to the refining stage, where part of the impurities existing in the alloy are removed before metal shotting and packaging for sale.

2.1

THERMAL PROCESSES EQUIPPED FOR DECARBONIZATION

The focus for decarbonization within the Barro Alto Industrial Complex will be at the dust pelletizing, pulverizing and refining stages that currently use LPG from the existing supply facility for thermal application. Shifting away from carbon-based fuels at these three identified processes will exploit significant environmental benefits and will reduce the operation's dependence on LPG.

Currently, at the pellet drying plant, LPG is supplied to two hot gas generators (HGGs) to produce hot gas which is used to dry the pellets. The coal plant also utilizes an HGG to produce hot gases which are used to directly dry the wet coal. Lastly, the FeNi refinery operates five LPG-fueled burners including one vertical ladle pre-heater, one horizontal ladle pre-heater, two tundish pre-heaters, and one rotary dryer. The goal of this project is to displace the use of LPG in these three areas with the carbon-neutral eCombustible fuel.

3

ECOMBUSTIBLE FUEL

To generate the eCombustible fuel, a proprietary industrial electrolyzer is used which requires less power than traditional electrolysis to decompose water into diatomic hydrogen and oxygen. The thyristor or SCR controller is tuned in such a way that it dissipates a minimum amount of energy in the microcell units without affecting the quantity of hydrogen generated. In addition, ortho-hydrogen is converted into para-hydrogen with the use of a magnetic reactor. Hydrogen and oxygen, will be continuously generated on site at the Barro Alto Industrial Complex then separately compressed and stored for use as needed for the aforementioned thermal applications. Upon combination prior to the combustion process, the hydrogen and oxygen are then known as eCombustible fuel.

Unlike conventional hydrogen combusted with conventional oxygen, the unique eCombustible fuel provides similar flame characteristics and calorific values as fossil fuels such as LPG which allow it to replace such fuels with minimal modifications to existing equipment. After installation of the eCombustible production plant, reserves of LPG will be maintained only as a backup fuel. The existing combustion systems will be adapted to operate with either of the two fuels.

4

ENVIRONMENTAL IMPACT

Replacing LPG fuel with eCombustible, which is more competitive from an environmental and economic point of view, will provide benefits that are in line with Anglo American’s strategic objectives, that is, the search for an increasingly “cleaner” operation, in terms of reduction of CO2 emissions, as well as the reduction of operating costs. The reduction in CO2 emissions with the use of eCombustible is estimated at approximately 2,869 t per month based on historical records. Table 1 shows a summary of the historical average monthly CO2-eq emissions by area (pellet dryers, coal mill and refinery) from 2016 to 2020.

Table 1. Average Monthly CO2-eq Emissions (t CO2-eq/month)

YEAR	PELLET DRYERS	REFINERY	COAL MILL	TOTAL
2016	2,047	364	530	2,941
2017	2,151	376	228	2,754
2018	1,961	362	530	2,853
2019	1,993	362	465	2,820
2020 ¹	2,027	362	588	2,976
AVERAGE	2,036	365	468	2,869

¹Data range from January 2020 to August 2020

Potential impacts on flora and fauna are negligible as the generation and storage facility will be installed and operated on an already industrially developed area. Clearing of vegetation will not be necessary during the implementation of this project.

The combustion of eCombustible fuel within the Barro Alto smelter burner applications generates water vapor as the main constituent in the combustion product. Production of other potentially controlled emissions (e.g., nitrogen oxides or NOx) will be minimized by implementing appropriate engineering and/or operational solutions.

The main waste stream resulting from the operation will be wastewater from the water treatment system. The physicochemical characteristics and flowrate of this wastewater are estimated to fall within the environmentally-acceptable permissible limits to allow for its safe disposal within Barro Alto's existing process water handling system.

Regarding the mitigation of environmental impacts, Anglo American already practices control measures aimed at controlling impacts on the industrial site. These measures take place throughout Anglo American's site in Barro Alto and will extend to the location of the eCombustible plant.

The implementation of this project will be a milestone in the fulfillment of Anglo American's strategic objective of making its ferronickel operations the first in the world to be operated 100% with renewable resources and 100% with internally reused water.

5

INTEGRATION WITH EXISTING INFRASTRUCTURE

The eCombustible production plant will be built in a greenfield area conceded by Anglo American within the Barro Alto Industrial Complex as part of the agreement with eCombustible Energy LLC. The project requires earthworks and the construction of new foundations and reinforcements to support the equipment. An electrical equipment room, control room and small warehouses dedicated to the proper storage of chemical reagents will be included at the plant's construction site. eCombustible electrolyzers will be installed in containerized modules that allow for easier transport, installation and subsequent mobility (when necessary). The same containerized approach (or alternatively, a module-assembled approach) will be followed for other components (e.g., electrical equipment room, control room, warehouses) and auxiliary process systems (e.g., electrolyte cooling system and water treatment system). A security system will be installed around the perimeter of the eCombustible plant to prevent unauthorized persons from entering the area, as well as bollards around all tanks to prevent accidental vehicular collisions.

Existing pipeline infrastructure (including gas feed trains) currently used to transport LPG to all HGGs and burners will remain unaltered. This will allow the Barro Alto smelter to continue using LPG normally and at its discretion. New dedicated pipelines will be installed to transport the hydrogen and oxygen to all end-users. These systems will be equipped with all the necessary instrumentation to guarantee the distribution of gases with quality and safety (e.g., flow meters, pressure, gas leak detectors). Additional piping requirements will include pipelines to supply raw water to the eCombustible system from existing infrastructure.

The eCombustible system consumes electrical energy for the operation of its various equipment and instruments. Most of the energy will be consumed by the electrolyzer cells to carry out the electrolysis process. Other devices with lower electricity consumption within the process are the magnetic reactor, the gas compressors and various pumps. The Barro Alto smelter will supply power via a high-voltage transmission line that will be installed from the existing main electrical substation to the eCombustible plant. This new line will be connected to a new local transformer within the perimeter of the eCombustible production facility.

Inside the eCombustible production plant, there will be a facility to receive and treat the raw water necessary for the production of the eCombustible fuel. This subsystem is designed to treat the entire volume of water intended for consumption by the plant and will be responsible for reducing water hardness and removing other impurities that could affect the performance of the water electrolysis process. The technology to treat this water consists primarily of ultrafiltration and reverse osmosis systems.

The eCombustible production plant's location has been selected in collaboration with Barro Alto personnel by identifying the least environmentally impactful area (no need for vegetation suppression, no impact on fauna, flora and water courses), and the potential for future production expansion. Figure 3 shows the area selected for the construction of the new plant.



Fig. 3. eCombustible Production Plant Location

The pellet dryer HGGs will be prioritized as the first stage to demonstrate the technical performance of the eCombustible fuel operation. A ramp-up program will be implemented to ensure that the combustion performance of the new fuel satisfies safe control standards and that the hot gas generated complies with the target process conditions required to enable effective and efficient drying of the pellets. Figure 3 shows a pellet dryer HGG.

Ecombustible Energy LLC is currently executing a testwork program to demonstrate the applicability of the use of eCombustible fuel as an industrial fuel in common thermal applications. A key priority in this testing program is to test the eCombustible fuel combustion performance with a burner design equivalent to the one currently installed at the commercial pellet dryer HGGs. The results of this testing will be evaluated and considered as input for potential retrofit requirements at the Barro Alto pellet dryer HGGs.

6

SAFETY

The design of the eCombustible fuel production and combustion systems follows a series of codes and standards to ensure compliance with safe design requirements. International, Brazilian and local codes and standards are used in the design process to minimize risks in the production, storage, handling and combustion of the eCombustible fuel. Additionally, multiple technical peer reviews have been undertaken by independent professional safety consultants. Anglo American's personnel have also actively participated in the development of Hazards Identification and Hazards and Operability workshops. The following subsections describe basic design features to address safety considerations for the main process areas.

6.1

WATER TREATMENT SYSTEM

Water holding tanks are installed to ensure a constant supply of raw water to the reverse osmosis system and clean water to the electrolytic cells to prevent fluctuations in water flow which can damage and/or affect the performance of electrolytic cells. The tanks themselves are equipped with level transmitters and drain valves to monitor the water level and drain as needed. To prevent damage to the electrolytic cells, the quality of the water (raw and treated) is monitored through various safeguards such as redundant conductivity meters, pH meters and manual water hardness tests. Both automatic and manual valves are installed in case of deviations and/or shutdowns. There are conductivity meters in the water recirculation line and pH meters in the treated water supply line installed to ensure that incorrect KOH solution dosing does not lead to low hydrogen production and/or contamination of cell membranes.

6.2

ELECTROLYSIS

High temperatures can lead to evaporative loss of electrolyte solution, reduced process efficiency and premature failure of cell stacks. An electrolyte cooling system is installed to remove excess heat from the electrolyte (with temperature transmitters at the inlet and outlet of the heat exchangers to monitor operating temperatures). Low electrolyte flow in pumps can lead to cavitation and a lower volume of electrolyte in cells. The latter, in turn, can lead to the burning of cell components, resulting in permanent damage. In addition, a lower circulating volume of electrolyte would result in a lower level of electrolyte in the oxygen and hydrogen holding tanks, which could lead to mixing of oxygen and hydrogen gases. The process is equipped with engineering controls to avoid mixing oxygen and hydrogen and therefore mitigating the risk of explosions. Level transmitters are installed on each gas holding tank accompanied by an automated shutdown procedure when a low level set point is reached. Sight glasses are installed in the tanks for manual checking of liquid levels. Pressure transmitters are installed at the pump discharge to monitor the discharge pressure. Electrical components are properly insulated, and non-conductive material is used in piping and hoses to prevent personal injury. The electrical components of the electrolysis module are also physically shielded to protect against potential electrolyte leakage.

6.3

GAS COLLECTION AND HANDLING

Water separators are installed in the ventilation lines to capture droplets as electrolyte carryover in the gas can result in the accumulation of KOH (precipitate from the solution) in downstream ducts and equipment. There are pressure relief valves and emergency stacks with flame arrestors installed in the gas storage tanks in case of any mechanical blockage causing pressure build-up. Hydrogen and oxygen are kept in dedicated, adequately spaced holding tanks to minimize the risk of mixing and possible subsequent explosions. There are pressure sensors installed in both tanks, and the pressure differential is monitored between them to always ensure that the hydrogen holding tank has a higher pressure than the oxygen holding tank. This will reduce the risk of oxygen flowing from the oxygen holding tank to the hydrogen holding tank.

6.4

ECOMBUSTIBLE FUEL COMBUSTION

The flows of hydrogen and oxygen gas supply are monitored through redundant pressure transmitters and flow meters. Flame stability is monitored using UV/IR flame sensors and exhaust temperature sensors. The air to gas ratio is controlled to prevent flame loss and maintain optimal combustion conditions.

6.5

ELECTRICAL & INSTRUMENTATION SYSTEM

All instrumentation is designed for Class 1, Division 2 per the National Electrical Code (NEC) in the areas of electrolyzer and gas storage and processing. Standard security system design is in accordance with applicable codes. All equipment will be properly secured to reinforced concrete bases that will prevent damage from rain, and concrete barriers are installed around key areas to prevent accidental vehicle collisions. There are hydrogen and oxygen sensors installed around each gas storage tank in the generating plant to detect potential leaks.

7

CONCLUSION

Displacing fossil fuel dependency through the implementation of the novel eCombustible technology at the Anglo American Barro Alto Industrial Complex promises to greatly enhance Anglo American's position as a producer of environmentally-sustainable nickel. Given that the technology is new, significant risk reduction and mitigation steps will ensure that risks to personnel, assets and the environment are minimal. The project is currently undergoing final preparatory work and will see construction of the eCombustible production plant in 2022. Upon successful completion of this project, Anglo American will consider implementing the eCombustible technology at the Codemin ferronickel smelter located in Niquelandia.



WHITE PAPER AUTHORS

- Paykan Safe, CEO-Gas Cleaning Technologies
- Jorge Arevalo, CEO and Founder, eCombustible Energy LLC
- Carlos Kiyon, Vice President, Engineering, eCombustible Energy LLC
- Mario De Abreu Rodrigues, Process Manager, Anglo American
- Marcelo de Paule Moreira, Process and Development, Anglo American



ABOUT ECOMBUSTIBLE ENERGY

eCombustible Energy is a game changer offering high performing, carbon-free, hydrogen fuel for large industrial companies (stationary thermal sector) seeking a proven technology to cost effectively eliminate their CO2 challenges and secure energy independence to their current infrastructure.



ABOUT GAS CLEANING TECHNOLOGIES

Gas Cleaning Technologies, established in 1995, provides specialized process engineering services in air pollution control and energy optimization for the metals processing industry around the world.



ABOUT ANGLO AMERICAN

Anglo American is a leading global mining company and its products are the essential ingredients in almost every aspect of modern life. Its portfolio of world-class competitive operations, with a broad range of future development options, provides many of the future-enabling metals and minerals for a cleaner, greener, more sustainable world and that meet the fast growing every day demands of billions of consumers.

This paper was presented on Monday, August 22 at the 61st Annual Conference of Metallurgists